


Table of contents

- 1. Core and Capstock
- **2.** Colour Options
- **3.** Architectural Series
- **4.** Designer Series
- **5.** Modern Series
- **6.** Fascia
- 7. Warranty
- **8**. Care and Maintenance
- 9. Get Inspired

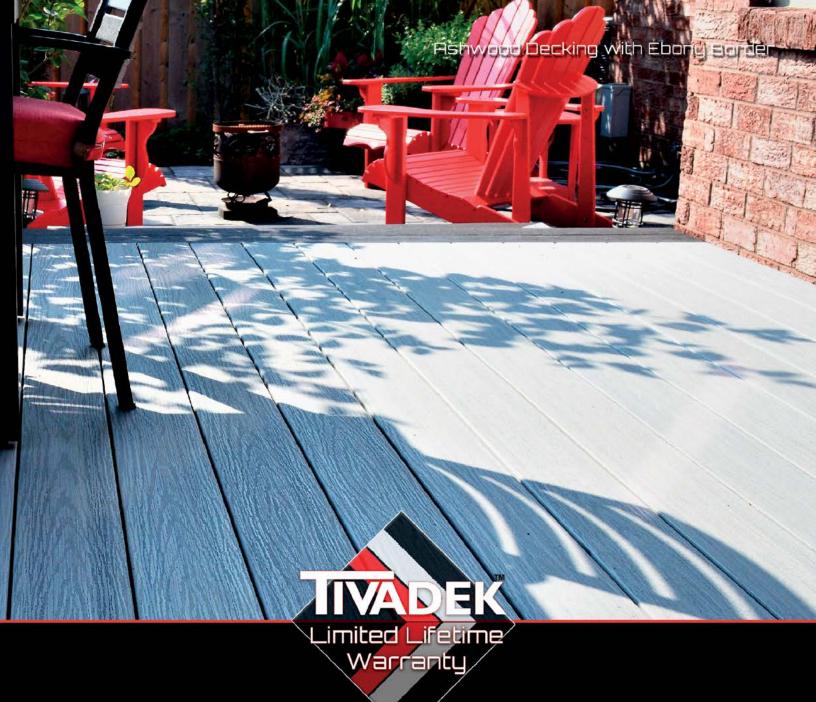

Our team has been in the plastic extrusion moulding industry for over 20 years. This vast experience in a rapidly changing industry has made us the plastics experts we are today. Over the last 15 years, we have been conducting research and development with industry leading experts to uncover the challenges and successes in PVC decking. We have researched throughout North America and gained first hand insights from decking experts to top designers, and master builders to engineers. With this extensive knowledge, our team of mechanical and chemical engineers, alongside architecture and design experts, have created the TIVADEK PVC decking collection that has exceptional performance and an exotic finish.

WE'VE GOT YOU COVERED

The advanced PVC core is capped with an ASA capstock. ASA (Acrylic-styrene-acrylonitrile) is a tough and rigid plastic that is well known in the Automotive Industry for its heat resistance, colour retention, and high outdoor weatherability.



SUPERIOR UV Protection



STAIN Resistant



SCRATCH RESISTANT



SUITABLE FOR Harsh Climates



RESISTS AGAINST Moisture Damage



MOLD AND MILDEW RESISTANT

INDUSTRY FIRST

Finished and Embossed on all 4 sides

RIGHT TO THE CORE

TIVADEK PVC Decking uses advanced Carbon Nanotechnology to construct its core. This unique and industry leading technology is what makes TIVADEK PVC Decking one of the strongest and most stable PVC deck boards on the market.

Core and Capstock

Architectural Series










Designer Series











TIGERWOOD












Square edge deck boards: 1" x 5.5" Available in 16ft. and 20ft. lengths



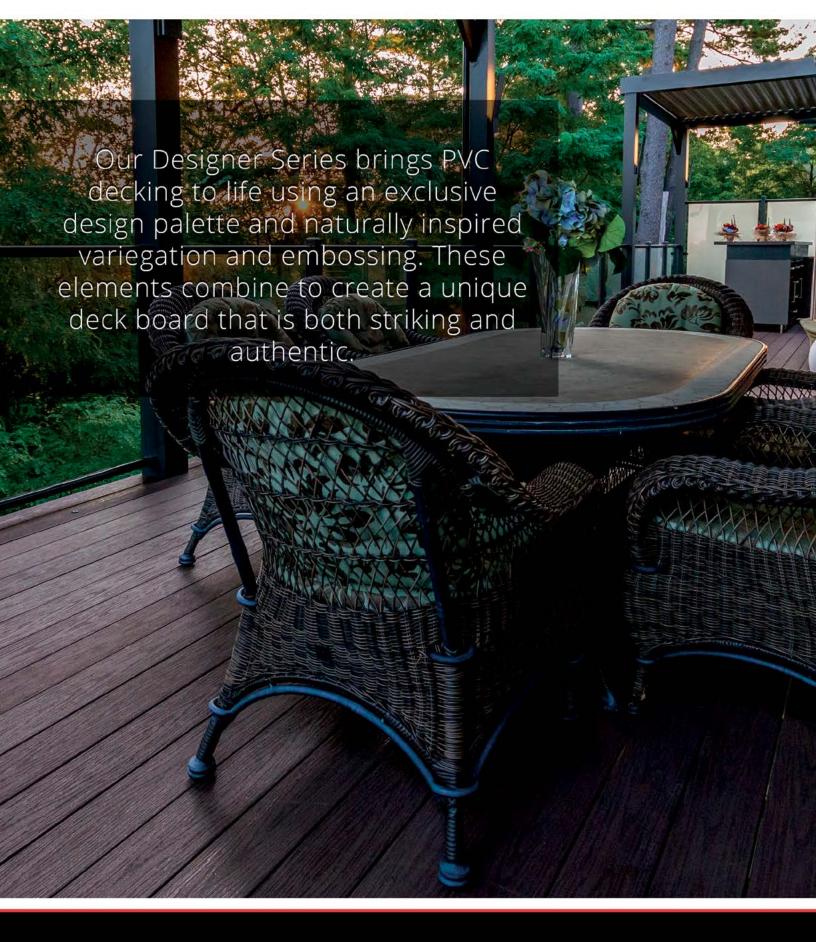





Modern Series

Our fascia has the only dimensions of it's kind in the industry. Measuring a unique ½ " x 8 ½ " profile, this multipurpose cladding can be used for rim joists, posts, beams, and stair risers. Fascia is available in all series.





LIMITED LIFETIME WARRANTY

Statement of Warranty: TIVADEK PVC decking products (hereinafter "Products") are covered by a limited lifetime warranty from TIVA Building Products Inc.. (hereinafter "Manufacturer"). This limited lifetime warranty is extended to either (1) the original purchaser or (2) the owner(s) of the property, at the time of installation, where the Products were installed (collectively hereinafter "Purchaser"). For warranty purposes, a single-family residential homeowner shall be referred to hereinafter as a "Residential Purchaser" and any Purchaser other than a Residential Purchaser shall be referred as a "Commercial Purchaser".

The terms of this warranty shall extend twenty-five (25) years for a Residential Purchaser and fifteen (15) years for a Commercial Purchaser from the date of original purchase. Except as set forth in the exclusions and restrictions detailed below, the Manufacturer warrants that the Product will be free of defects and will not split, rot, splinter, delaminate, crack, excessively swell, or suffer structural damage from termites or fungal decay. If any of the defects listed above are discovered in the Product, and are determined to be caused solely by manufacturing or material defects, the Manufacturer, in it's sole discretion, will either replace or repair the defected Products, or provide a proportional refund as described in the "Prorated Refund Program" detailed further in this warranty.

Stain and Fade: TIVA Building Products warrants that the Product will be resistant to permanent stains attributed to spills of food or beverage items and resistant to colour change in excess of 5 Delta E (Hunter) units from light and weathering, from the date of original purchase through the duration of the warranty terms stated above, given that the Products were installed in accordance with the Installation Manual, and have been maintained and cared for as stated explicitly in the Care & Maintenance Instructions found on www.TIVADEK.com. Failure to follow all TIVADEK written Installation and Care and Maintenance instructions found on www.TIVADEK.com voids all warranties in their entirety.

Exclusions: TIVA Building Products does not warrant, and assumes no liability, for any product failure, damages or malfunctions that are in any way attributable to: (1) improper handling, storage or installation of the Product, (including failure to adhere to local building codes and/or failure to abide by the Manufacturer's Installation Manual) improper installation of joists or other accessories, or improper gapping and spacing; (2) Product abuse, neglect, or any misuse including the use of the Product beyond its designed purpose or installing product in applications not recommended by the Manufacturer's installation guidelines or local building codes; (3) movement, shifting, settlement, or collapse of the foundation, ground or supporting structure upon which the Products are installed; (4) Product that has been damaged or altered by uncontrollable natural forces or other severe weather such as, but not limited to, hail, tornado, flood, hurricane, earthquake or other Acts of God; (5) incorrect structure design; (6) loading structure beyond the maximum designed live load; (7) normal weathering of the Product's surface due to natural effects (including exposure to direct sunlight or weather conditions causing fading or colour change of 5 Delta E (Hunter) units); (8) fading or surface damage due to exposure to sunlight reflected from low-emissivity (Low-E) glass, or direct or indirect contact with extreme sources of heat; (9) any applications of coating or painting to the Product that are not recommended by the Manufacturer in writing; (10) fabrication, remanufacturing or manipulation of the Product by third parties.

Determining safety, effectiveness and suitability of the Product used in the Purchaser's application is their sole responsibility. TIVA Building Products is not liable for Purchaser's Product selection in connection with their particular application.



HOW TO CARE FOR YOUR TIVADEK

TIVADEK PVC decking is highly durable and is covered by a Limited Lifetime Warranty. In order to prolong the product's longevity, proper maintenance and care is required to keep your TIVADEK PVC deck looking and performing its best. The following care instructions should be followed to maintain warranty coverage:

- For dirt and debris removal, beyond power washing, periodic washing of the product using an all-surface biodegradable household cleaning product is recommended, using a firm, natural fibre cleaning brush. Using solvent-based or harsh cleaning products will void the product warranty.
- For rust removal, a biodegradable toilet bowl cleaner should be used. It is always best to test all cleaning products on a scrap piece of board or on a small inconspicuous area of your TIVADEK PVC deck.
- Chemicals found in products such as sunblock or insect repellent can cause discolouration or damage the decking surface. Avoid using these products on your TIVADEK PVC deck.
- Avoid leaving pool covers and toys, rubber-backed items, tarps and other such non-porous materials on your TIVADEK PVC deck as they can cause discolouration when left on decking surface for any extended period of time.
- During installation be careful not to transfer any PVC adhesive, or similar product, on the surface of your TIVADEK PVC deck. It can permanently damage, stain, or discolour the decking surface.

Ice and Snow Removal:

- Use caution when walking on TIVADEK PVC deck surface during winter weather. As with any walking surface, it may become slippery in winter conditions.
- For ice removal, most de-icing products containing calcium chloride can be used without damaging the decking surface. These products could leave a white residue behind, which can be removed using the instructions above. NOTE: Granular products may cause marking on the deck surface if walked on top of.
- For clearing snow, NEVER use a metal shovel or plastic shovel with a metal leading edge. Use a plastic shovel with caution to avoid surface scratches.

Considerations:

- Over time, due to natural weathering, TIVADEK PVC decking may appear to lighten depending on intensity of sunlight exposure and other environmental conditions.
- As with many plastic materials, static-build up can occur in TIVADEK PVC decking. It is a naturally
 occurring phenomenon that will gradually reduce and nullify as time passes and as elements such as
 dust and rain are encountered.
- Although TIVADEK PVC decking has a high heat resistance, all decking surfaces get hot in direct sun exposure. Lighter coloured boards will keep cooler than darker colours.
- DO NOT cut any product on or near TIVADEK PVC decking, especially metal, as shavings or sparks could cause decking to melt.
- DO NOT allow jobsite debris or dust (from concrete or masonry products), dirt, mud, etc. build up or sit on TIVADEK PVC decking as it may cause damage the decking surface.











Get Inspired



TIVADEK.com



info@TIVADEK.com

